


PA Duopart®

Double polyamide hose as burr-free connection solution



spiral-free

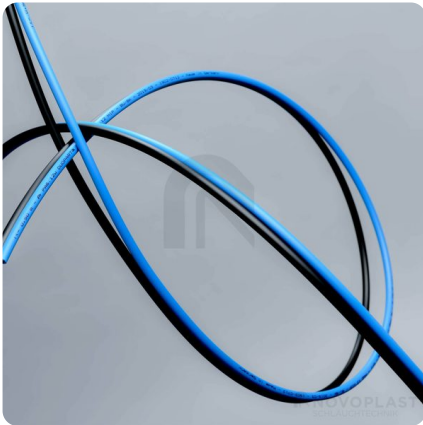

metal-free

Product Details

Construction / Material

- Type of construction: axially extruded tubing without seams or welds
- Execution of the wall: made of highly abrasion-resistant material, dimensions and tolerances correspond to DIN 73378 and manufactured according to DIN 74324

Properties

- Specifications of the product: manufactured with calibrated outer diameter
- Chemical Properties: good resistance to chemicals, good resistance to solvents, good resistance to oil, good UV resistance, halogen-free, hydrolysis resistant, good resistance to fats, free from paint wetting impairment substances (LABS)
- Mechanical Properties: small bending radius, high resistance to stress corrosion cracking, high mechanical strength and impact resistance

Operating Temperature

- Temperature Range: -40 to 90 °C

Delivery Information

- Delivery, type of production: inner diameter: 2.0 - 8.0 mm, outer diameter: 4.0 - 10.0 mm

Application Areas


- Areas of application: Agriculture, Automotive, Plant & Mechanical Engineering, Robotics & Automation, Industry, Semiconductor Industry, aviation technology, Bulk & Construction, Sea & Rail transport, Chemistry, Surface Technology, Waste Disposal & Cleaning Technology, Plastics, Conveying, lifting & feeding technology, Textile, Printing & Paper, Vehicle Construction, Metal & Toolmaking

Customizing Options

- optional item modification (on request): other colours, printable, multiple hose, rolls

Disposal instructions

After use, the product must be disposed of in accordance with the legal regulations applicable in the user's region (in Germany in accordance with the applicable Waste Catalogue Ordinance (AVV)).



Individual consultation

We offer consultation by phone: **+49 209 97077 0**

Product requests via: <https://www.masterflex.it/>

Headquarters for your sales area

Masterflex SE

Willy-Brandt-Allee 300
45891 Gelsenkirchen
Germany