




## Cargoflex

Article Master No.: 000183

PU Suction hose & Transport hose, extremely abrasion and vacuum resistant

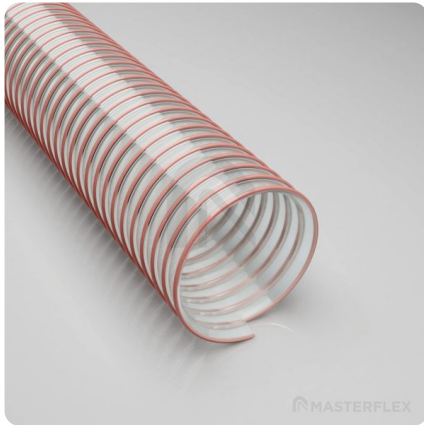

transparent



moderately  
flexible



heavy



very pressure  
resistant

### Product Details

#### Construction / Material

- Type of construction: profile extruded hose with metal spiral
- Spiral Design: made of steel wire
- Material of the spiral: spring steel
- Execution of the wall: made of pure material, wall thickness between the spirals approx. 3.2 - 4.8 mm, depending on DN
- Material of the wall: polyester polyurethane
- Specifications of the wall: material is more abrasion resistant than comparable polyurethane according to DIN ISO 4649

#### Properties

- Chemical Properties: microbe-resistant, halogen-free, good UV resistance, good ozone resistance, plasticiser-free
- Mechanical Properties: excellent mechanical tensile strength and tear resistance
- Flexibility: moderately flexible
- Weight: heavy
- Pressure Resistance: very pressure resistant
- Colour: transparent
- Other: high vacuum and good pressure resistance, longer service life

Operating Temperature

- Temperature Range: -40 to 90 °C
- short-term maximum temperature: peaks to 125 °C

Delivery Information

- Delivery, type of production: various nominal diameters in standard lengths are available ex-production, individual nominal diameters and lengths also ex-stock

Application Areas

- Areas of application: Industry, Bulk & Construction, Chemistry, Food & Pharma, Plastics, Metal & Toolmaking

Customizing Options

- optional item modification (on request): other lengths, other nominal widths, with customer-specific imprint

Article Variants

| Extended Article Number | Nominal Size (DN) in mm | Outer diameter in mm | Bending radius* in mm | Weight in kg/m | Operating pressure in bar | Negative pressure in bar | Max. Production length in m | Stock Lengths in m | Length (standard lengths available for order) in m |
|-------------------------|-------------------------|----------------------|-----------------------|----------------|---------------------------|--------------------------|-----------------------------|--------------------|----------------------------------------------------|
| 000183:102:x            | 102                     | 117                  | 300                   | 3.04           | 3.15                      | 0.87                     | 20.00                       | 5 / 10             | 15 / 20                                            |
| 000183:127:x            | 127                     | 143                  | 375                   | 3.75           | 2.55                      | 0.87                     | 20.00                       | /                  | 2.5 / 5 / 7.5 / 10 / 15 / 20                       |
| 000183:152:x            | 152                     | 168                  | 450                   | 4.45           | 2.25                      | 0.82                     | 20.00                       | 10                 | 2.5 / 5 / 7.5 / 10 / 15 / 20                       |
| 000183:203:x            | 203                     | 222                  | 600                   | 8.28           | 1.65                      | 0.66                     | 10.00                       | /                  | 2.5 / 5 / 7.5 / 10                                 |
| 000183:250:x            | 250                     | 270                  | 738                   | 10.20          | 1.37                      | 0.52                     | 10.00                       | /                  | 2.5 / 5 / 7.5 / 10                                 |
| 000183:254:x            | 254                     | 275                  | 750                   | 10.36          | 1.35                      | 0.51                     | 10.00                       | /                  | 2.5 / 5 / 7.5 / 10                                 |

All data refer to a medium and ambient temperature of +20°C.  
Specification of the bending radius related to the inside of the hose bend  
Subject to technical changes and colour deviations

## Delivery Variants

Available in other lengths, other nominal diameters, with customer-specific customer-specific imprint.

## Disposal instructions

After use, the product must be disposed of in accordance with the legal regulations applicable in the user's region (in Germany in accordance with the applicable Waste Catalogue Ordinance (AVV)).

## Suitable for the product



**Hose Clamp with Bolts**  
special clamp for fastening medium and heavy spiral hoses to connection pipes on mobile and stationary units



**Hose Clamp with Bolts, Steel quality W4, stainless steel 1.4301**  
Special clamp for fastening medium and heavy spiral hoses to connection pipes on mobile and stationary units




**Combiflex PU Cone Flange permanently installed**  
fixed quick connector system for all Master-PUR L, Master-PUR H and Master-PUR HX hoses, following DIN 3016



**Combiflex Cast-on PU Fixed Flange**  
Fixed PU flange for all Master-PUR hoses, for counterflanges to DIN 2632 / DIN 2633 / DIN 2673



**Combiflex Cast-on PU Swivel Flange**  
Fixed cast-on PU loose flange for all Master-PUR hoses, for counterflanges to DIN 2632 / DIN 2633 / DIN 2673



## Individual consultation

We offer consultation by phone: **+49 209 97077 0**

Product requests via: <https://www.masterflex.it/>

## Headquarters for your sales area

### Masterflex SE

Willy-Brandt-Allee 300  
45891 Gelsenkirchen  
Germany