


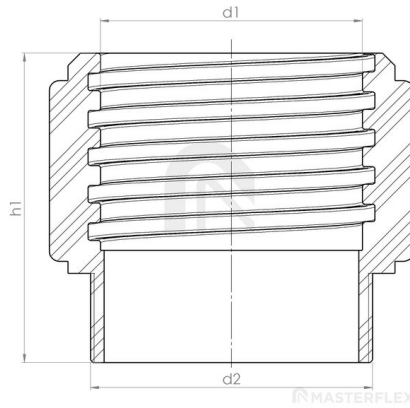

Combiflex PU Threaded Sockets

PU threaded connector for all Master-PUR L, Master-PUR H and Master-PUR HX hose types, based on DIN ISO 228

Product Details

Construction / Material

- Specification of the connection solution: connection thread is designed according to DIN ISO 228, tension-resistant and largely leak-proof connection
- Execution of the sprue / collar: high mechanical strength and impact resistance, made of abrasion resistant material
- Material of the sprue / collar: polyurethane

Properties

- Chemical Properties: hydrolysis resistant, microbe-resistant
- Colour: black
- Other: reusable and replaceable, easy to assemble

Operating Temperature

- Temperature Range: -40 to 90 °C
- short-term maximum temperature: peaks to 125 °C

Delivery Information

- Delivery, type of production: various nominal diameters are available ex production, individual nominal diameters also ex stock, individual nominal diameters also ex stock

Customizing Options

- optional item modification (on request): in permanently mounted design for liquid-tight, tension-resistant connections

Article Variants

Article number	DN of the hose in mm	suitable for / as	Piece weight in kg	Length (h1) in mm	Connection in Inch
001457	50	hoses in version L	0.16	83	2
001458	65	hoses in version L	0.23	94	2,5
001459	75	hoses in version L	0.26	102	3
001460	100	hoses in version L	0.53	124	4
001461	150	hoses in version L	0.95	109	6
001462	50	hoses in version H	0.16	83	2
001463	65	hoses in version H	0.23	94	2,5
001464	75	hoses in version H	0.26	102	3
001465	100	hoses in version H	0.53	124	4
001466	125	hoses in version H	0.65	100	5
001467	150	hoses in version H	0.95	109	6
001468	50	hoses in version HX	0.16	83	2
001470	65	hoses in version HX	0.23	94	2,5
001471	75	hoses in version HX	0.26	102	3
001472	100	hoses in version HX	0.53	124	4
001474	125	hoses in version HX	0.65	100	5
001475	150	hoses in version HX	0.95	109	6
006943	50	hoses in version Performance	0.16	83	2
001473	100	hoses in version Performance	0.53	124	4


Subject to technical changes and colour deviations

Delivery Variants

Available in other lengths, other nominal diameters, with customer-specific customer-specific imprint.

Disposal instructions

After use, the product must be disposed of in accordance with the legal regulations applicable in the user's region (in Germany in accordance with the applicable Waste Catalogue Ordinance (AVV)).



Individual consultation

We offer consultation by phone: **+49 209 97077 0**

Product requests via: <https://www.masterflex.it/>

Headquarters for your sales area

Masterflex SE

Willy-Brandt-Allee 300
45891 Gelsenkirchen
Germany