


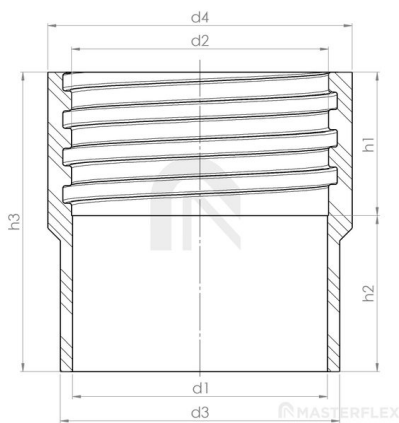

Cuff for Master-PVC-Flex

special coupling for connecting Master-PVC Flex hoses

Product Details

Construction / Material

- material of the cuff: soft PVC

Properties

- Chemical Properties: good resistance to chemicals, stainless, odourless and tasteless
- Mechanical Properties: kink-proof
- Other: easy to assemble

Operating Temperature

- Temperature Range: 0 to 70 °C

Delivery Information

- Delivery, type of production: various nominal diameters are available ex production, individual nominal diameters also ex stock, individual nominal diameters also ex stock

Article Variants

Article number	DN of the hose in mm	Length (h3) in mm	Outer Ø of the pipe (d1) in mm	Clamping range outside (d3) in mm	Outer Ø of flange or socket (d4) in mm	Screw-in depth of the hose (h1) in mm	Insertion depth of the threaded socket (h2) in mm	
002536	25	98	25	32	38	44	54	
002537	32	98	32	40	43	43	44	44
002538	38	98	38	47	49	49	48	48
002540	44	98	44	53	59	59	48	48
002541	51	98	51	59	63	63	48	48
002543	63	98	63	70	73	73	48	50
002544	70	98	70	78	86	86	54	44
002545	76	98	76	84	93	93	54	44
002547	102	113	100	108	118	118	65	48


Subject to technical changes and colour deviations

Delivery Variants

Available in other lengths, other nominal diameters, with customer-specific customer-specific imprint.

Disposal instructions

After use, the product must be disposed of in accordance with the legal regulations applicable in the user's region (in Germany in accordance with the applicable Waste Catalogue Ordinance (AVV)).



Individual consultation

We offer consultation by phone: **+49 209 97077 0**

Product requests via: <https://www.masterflex.it/>

Headquarters for your sales area

Masterflex SE

Willy-Brandt-Allee 300
45891 Gelsenkirchen
Germany